

HS SERIES

Burglary and Fire Resistant Safe

Most safes offer either burglary or fire resistance, rarely both, especially in this class. The all new **HS SERIES** is designed and constructed to sufficiently withstand both! With 90 minutes of fire protection, Manganese hard plate, glass relocks and a TL-30 locking mechanism, this safe stands in a class of itself. Perfect for storing both valuables and documents.

DOOR

The HS body is constructed of inner and outer electronically welded steel plates including our "Z" reinforcement bars cover the entire door. A manganese hardened steel plate protects the door and vital mechanism areas from drilling. The door has an overall thickness of 5 1/2" (140mm) and a barrier thickness of 2 1/2" (65mm). The specific arrangement and choice of the high-tech barrier materials is what gives the door superior resistance to a consistent and concentrated burglary attack with a wide range of modern tools.

BODY

The HS Series body is constructed of inner and outer electrically welded steel plates including our "Z" reinforcement bars welded to the inner and outer body that together with an advanced composite material form a 3" (75mm) thick wall creating an exceptionally strong body protecting various methods of attack.

BOLTWORK AND RELOCKING MECHANISM

Megasafe's patented 3 way, laser-cut locking mechanism activates massive 1 3/8" (35mm) bolts. Static bolts secure the door on the hinge side. A glass plate protects the vital mechanism area. An attack by tool, torch or explosives will shatter the glass activating 2 independent relocking devices thus preventing the safe from being opened. Finally, for added security, each bolt locks into individual chambers in the frame.



LOCKS

The HS Series is equipped with a Group 2 UL listed mechanical combination lock. Each safe has a ready preparation for fitting a second UL listed key lock. A UL listed electronic combination lock can also be fitted on safe as an optional extra.




HS 2014



Gold Edition

HS - Series

Burglary and
90 min fire protection

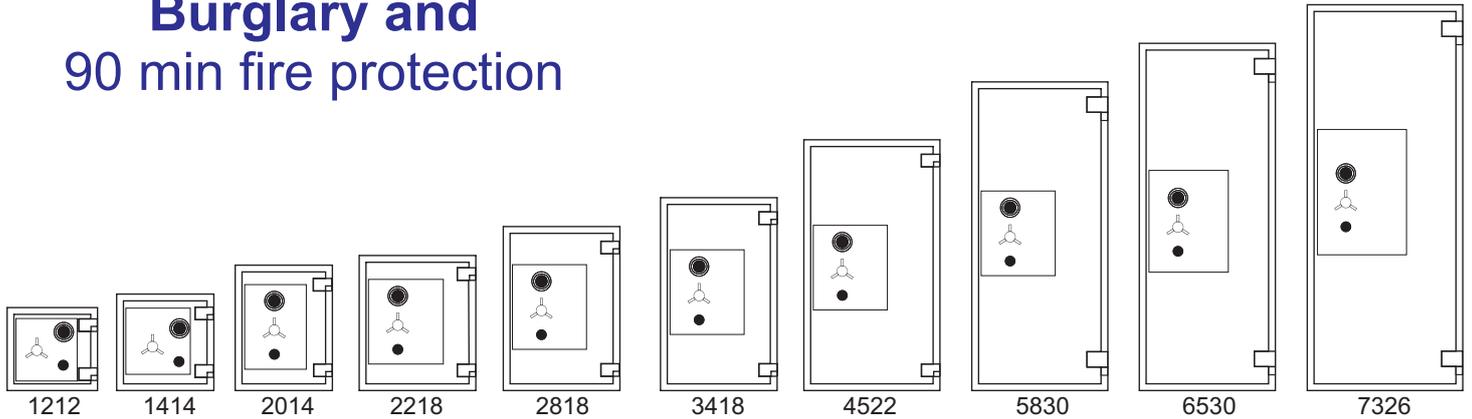


MODEL	INSIDE DIMENSIONS			OUTSIDE DIMENSIONS			APPROX. WEIGHT
	H	W	D*	H	W	D*	
HS 1212	12.0" (280mm)	12.0" (315mm)	13.0" (190mm)	17.5" (430mm)	17.5" (465mm)	18.5" (400mm)	353 lbs (160 kg)
HS 1414	13.8" (350mm)	13.8" (350mm)	12.6" (320mm)	19.7" (500mm)	19.7" (500mm)	20.9" (530mm)	540 lbs (245 kg)
HS 2014	19.7" (500mm)	13.8" (350mm)	11.4" (290mm)	25.6" (650mm)	19.7" (500mm)	20.9" (530mm)	639 lbs (290 kg)
HS 2218	21.6" (550mm)	17.7" (450mm)	13.4" (340mm)	27.5" (700mm)	23.6" (600mm)	21.6" (550mm)	816 lbs (370 kg)
HS 2818	27.5" (700mm)	17.7" (450mm)	13.4" (340mm)	33.5" (850mm)	23.6" (600mm)	21.6" (550mm)	1,050 lbs (476kg)
HS 3418	33.5" (850mm)	17.7" (450mm)	13.4" (340mm)	39.4" (1,000mm)	23.6" (600mm)	21.6" (550mm)	1080 lbs (490 kg)
HS 4522	45.3" (1150mm)	21.6" (550mm)	15.4" (390mm)	51.2" (1300mm)	27.6" (700mm)	23.6" (600mm)	1285 lbs (585 kg)
HS 5830	58.3" (1480mm)	29.5" (750mm)	23.2" (590mm)	63.0" (1600mm)	35.5" (900mm)	31.5" (800mm)	2238 lbs (1015 kg)
HS 6530	65.0" (1650mm)	29.5" (750mm)	23.2" (590mm)	71.0" (1800mm)	35.5" (900mm)	31.5" (800mm)	2588 lbs (1174kg)
HS 7326	72.8" (1850mm)	25.6" (650mm)	19.3" (490mm)	78.7" (2000mm)	31.5" (800mm)	27.6" (700mm)	2866 lbs (1300kg)

Door Swing Dimensions

MODEL	A	B	C
HS 1212	12.4" (315mm)	32.7" (830mm)	34" (865mm)
HS 1414	13.8" (350mm)	38.0" (965mm)	37.0" (940mm)
HS 2014	13.8" (350mm)	38.0" (965mm)	37.0" (940mm)
HS 2215	18.5" (470mm)	44.1" (1,120mm)	44.9" (1,140mm)
HS 2818	17.7" (450mm)	44.1" (1,120mm)	44.9" (1,140mm)
HS 3418	17.7" (450mm)	44.1" (1,120mm)	44.9" (1,140mm)

Door Swing Projections

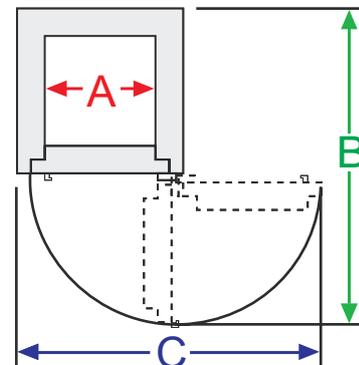

Authorized Dealer:

The manufacturer reserves the right to incorporate any improvements and alter any specifications without prior notice.